




Assembly and Installation Instructions for Model

10001PN

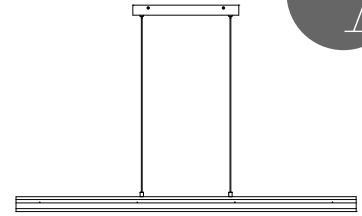

CAUTION - RISK OF FIRE

Installation of this fixture should be done by a licensed electrician or by a person familiar with local electrical codes and the construction and operation of this fixture.

Warning please make sure the electrical breaker is shut off before commencing with this installation. Read and familiarize yourself with these instructions before commencing.

This fixture is certified for ceiling mounting only and is suitable for Damp locations and dimmable with most dimmers. Supplied with a 120v A/C LED panel no driver required.

Package Contents		
Part	Description	Qty
A	Mounting bracket	1
B	Mounting bracket screws	2
C	Anchors and screws	4
D	Electrical wire connectors	3
E	Fixture assembly	1
F	Fixture attachment screws	4

Installing the fixture *please ensure the electrical breaker is switched off before commencing*

- 1 Orientate the fixture in the desired position prior to attaching the Mounting bracket (A). Loosely attach the Mounting bracket to the Junction-Box with supplied Mounting bracket screws (B) and mark the holes for the Anchors (C). Remove the Mounting bracket from the Junction box, drill and insert the Anchors. Re-attach the Mounting bracket and secure in place with Mounting bracket screws and Anchor screws.
- 3 Measure the height required and by pulling gently on the cable from the top of the canopy set the approximate height required leaving at least 6" of cable free for the fine adjustment and coil the balance of the cable with wire ties.
- 4 Connect the supply wires to the fixture wires using the supplied Electrical wire connectors (D). White supply wire to the White fixture wire, Black supply wire to Black fixture wire and the ground Bare Copper or Green wire to the Green fixture wire. Once the electrical wire connectors are securely fastened it is recommended to tape these connectors with electrical tape.
- 5 Attach the Fixture assembly (E) to the Mounting bracket (A) and secure with supplied Fixture attachment screws (F).
- 6 Once the fixture is secured to the canopy, adjust the height by releasing the Cable clutches by depressing the clutch which will release the excess cable. To shorten the cable gently push the cable into the Cable clutches.
- 6 Switch on the electrical breaker switch and your new fixture is ready for many years of trouble free use.

